

Fire Rated Roller Shutter




Dako (HK) Limited

High Performance Fire Rated Roller Shutters

Vertical, Lateral And Horizontal Sliding


British BS 476 Part 22
2 / 4 Hour Fire Rated Resistance

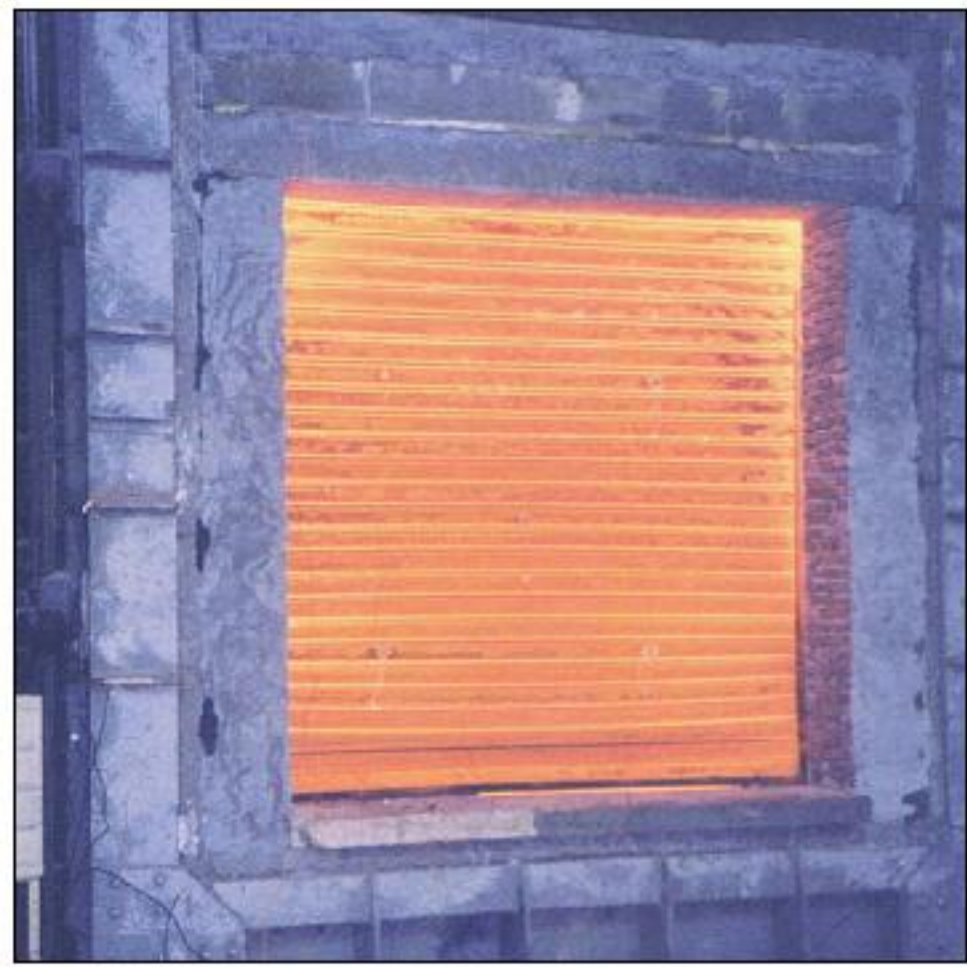


Vertical Sliding



Vertical Sliding w/ Fasia

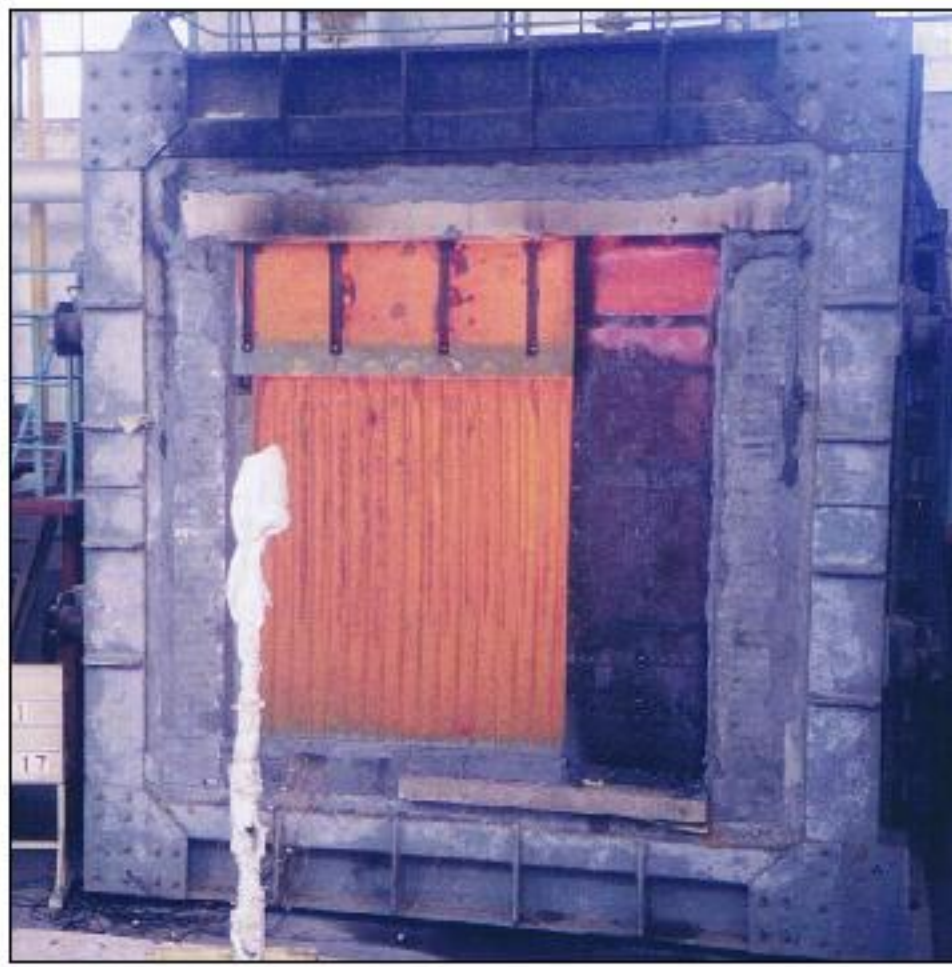

Lateral Sliding

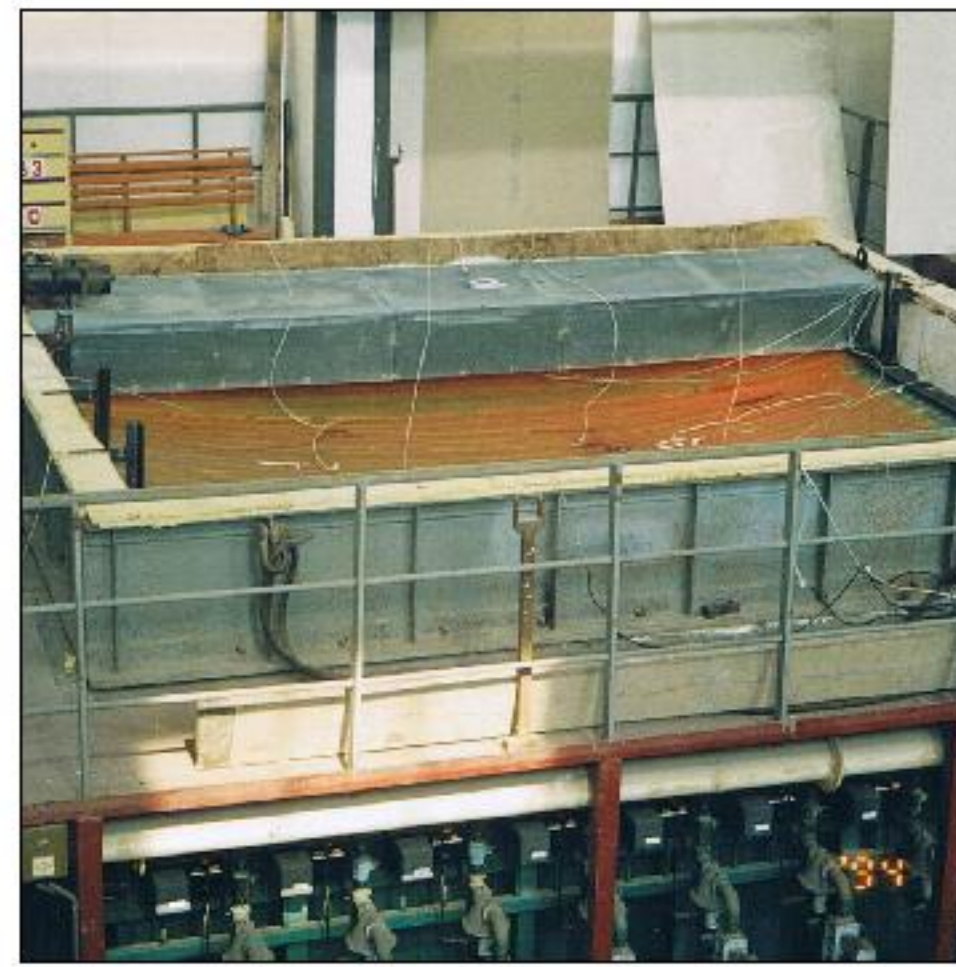

Horizontal Sliding

Photo Of Fire Resistance Test

Specification:

Shutter Curtain

Galvanized Mild Steel D-A7 / D-A1 Slat Curtain

Guide Rail

Galvanized Mild Steel 1.5mmt

Bottom Bar

Hot Dip Galvanized Mild Steel Double Angle 38x38x3mmt or
Double Flat Bar 40x40x3mmt

Shutter Hood

Galvanized Mild Steel 0.8mmt

Motor Drive Unit

Power Source: 220V 1 ϕ or 380V/415V 3 ϕ

Hand Chain or Crank Handle Manual Override

Switch box with 3-way Push Button

Auto Close by Relay Switch after Receive 24VDC Fire Signal

Optional Features

Fire Rated Steel Hanger Wall for Shutter Mounting / Fasia

Gravity Drop Manual Operator for Vertical Sliding Shutter

Fusible Link / Electro-thermal Link

Stainless Steel Finish




Remote Control

Typhoon Resistance

Other Special Features, please contact our sales for assistance

Standard Design Drawing:

Vertical Sliding Fire Shutter

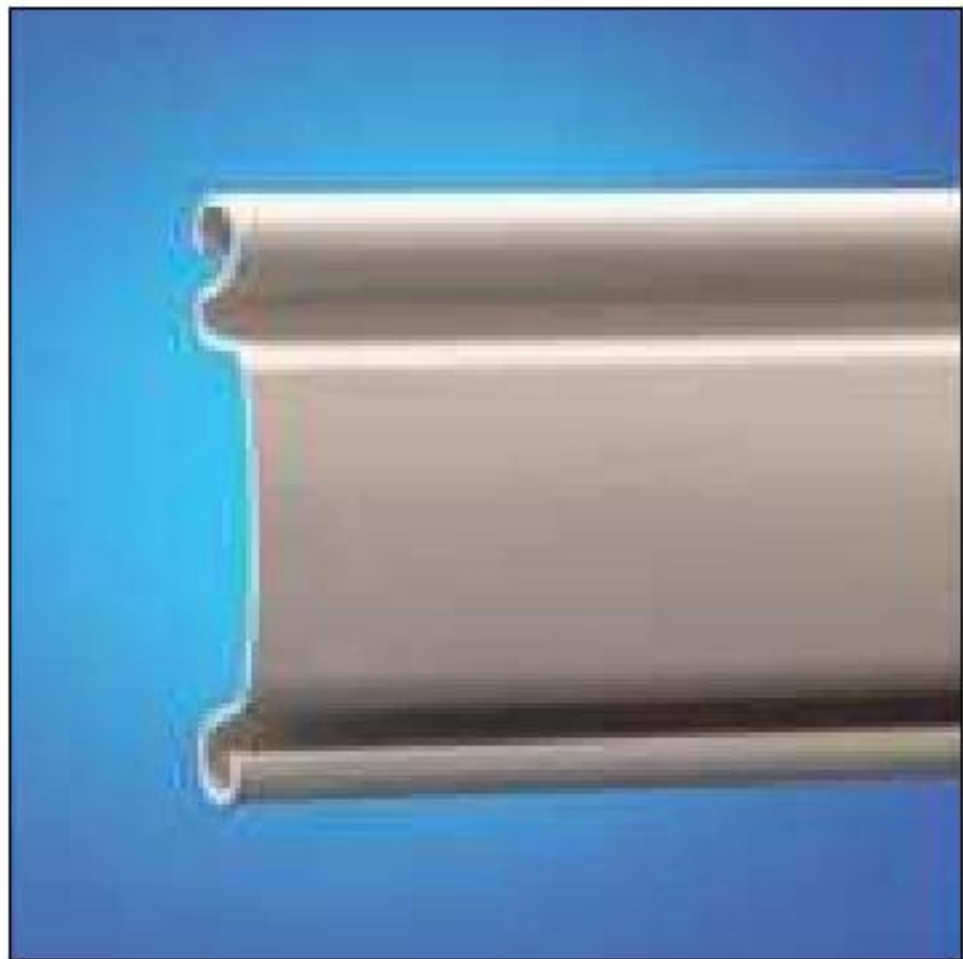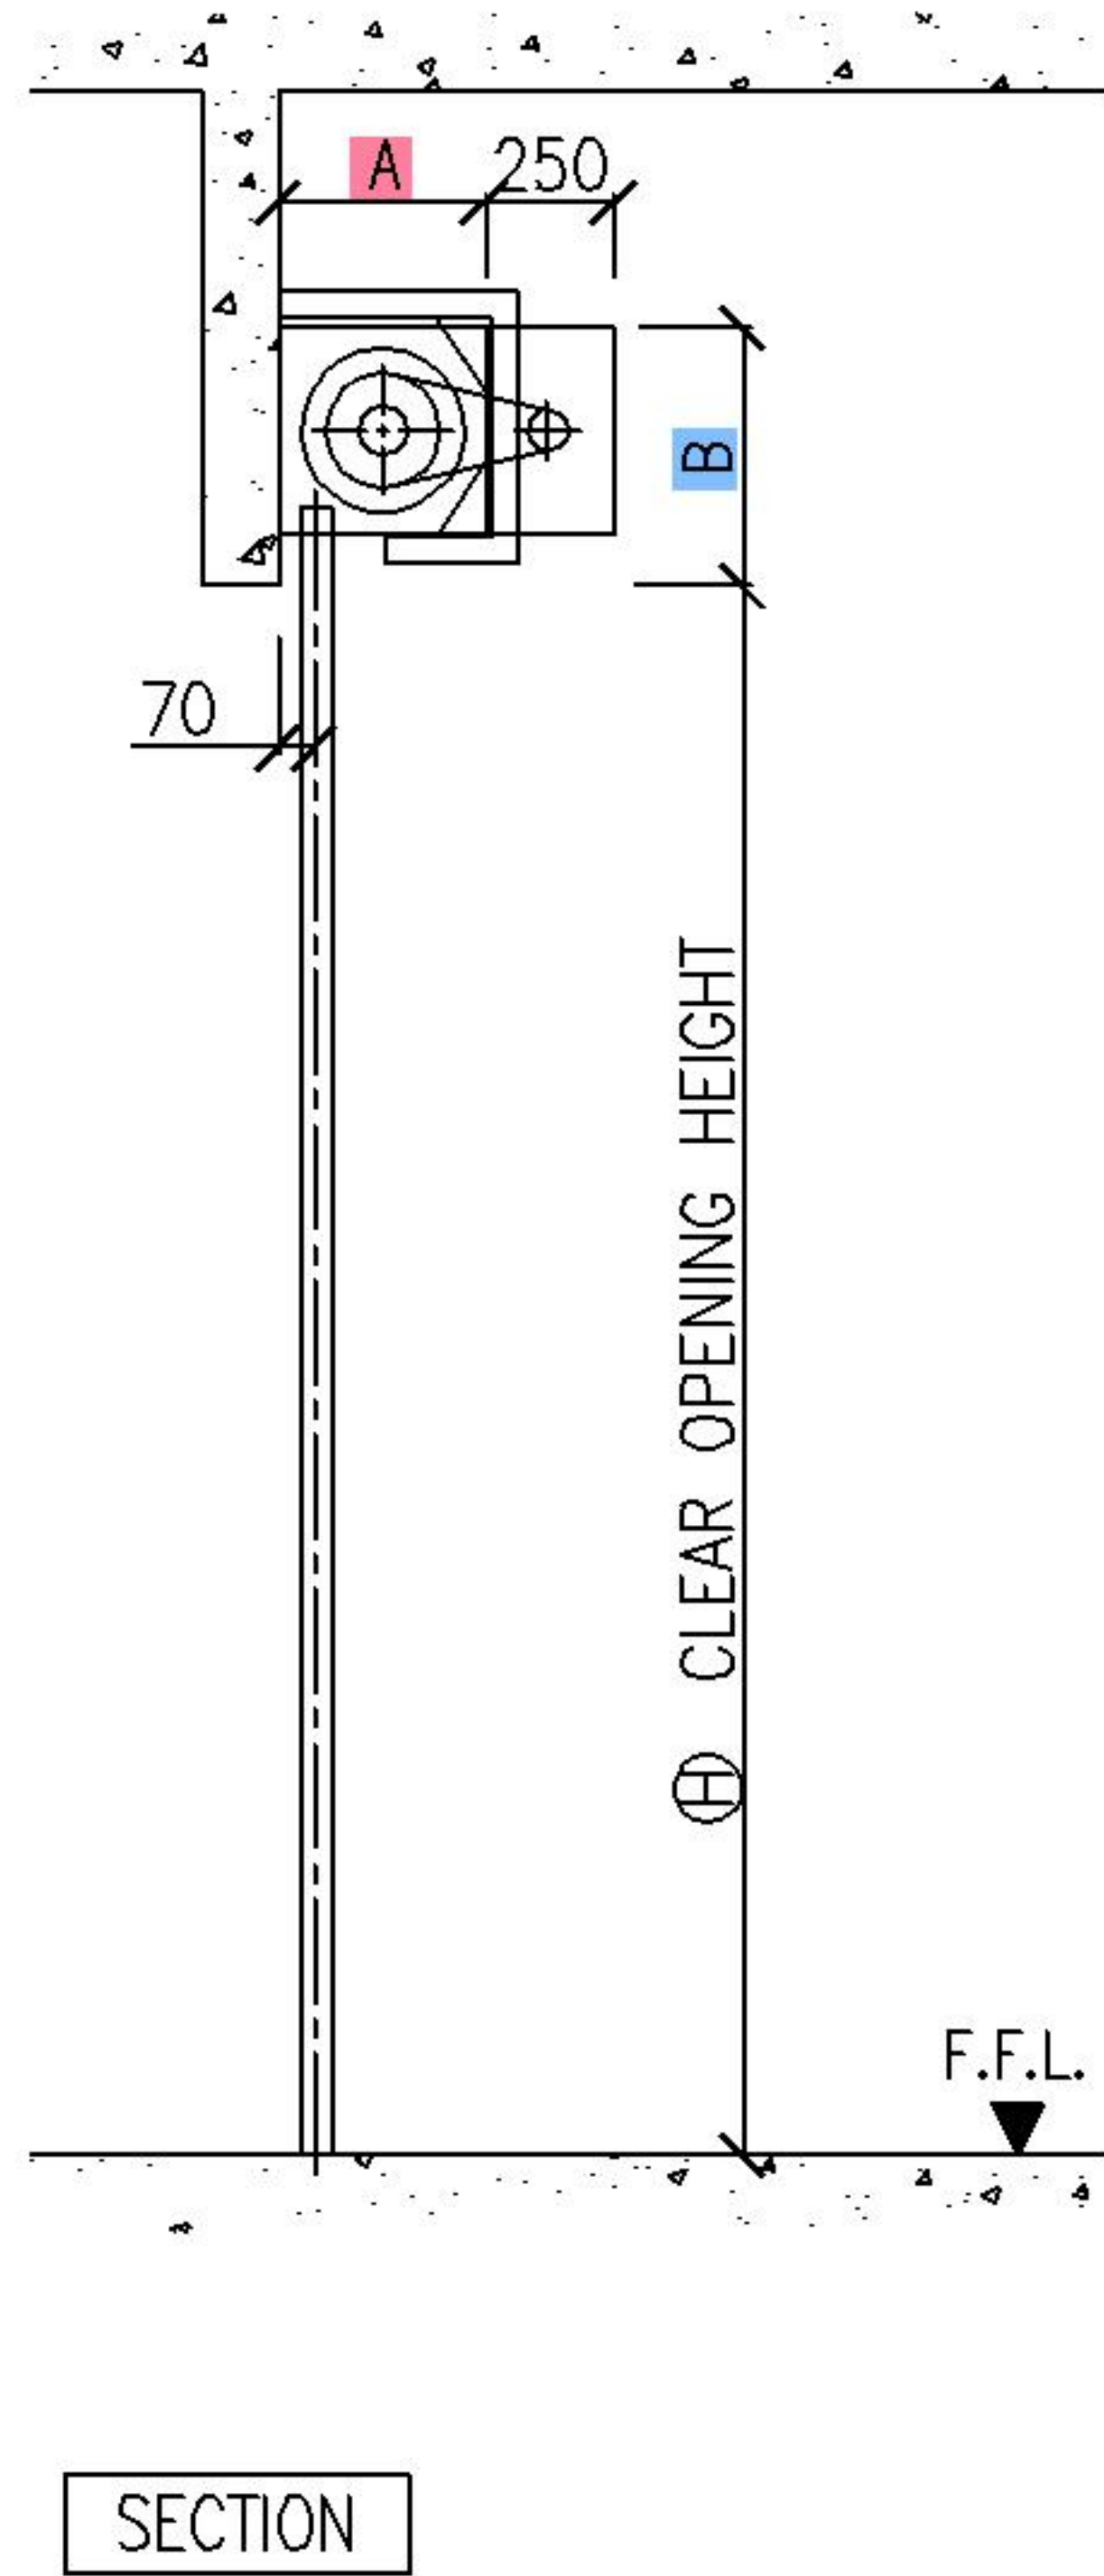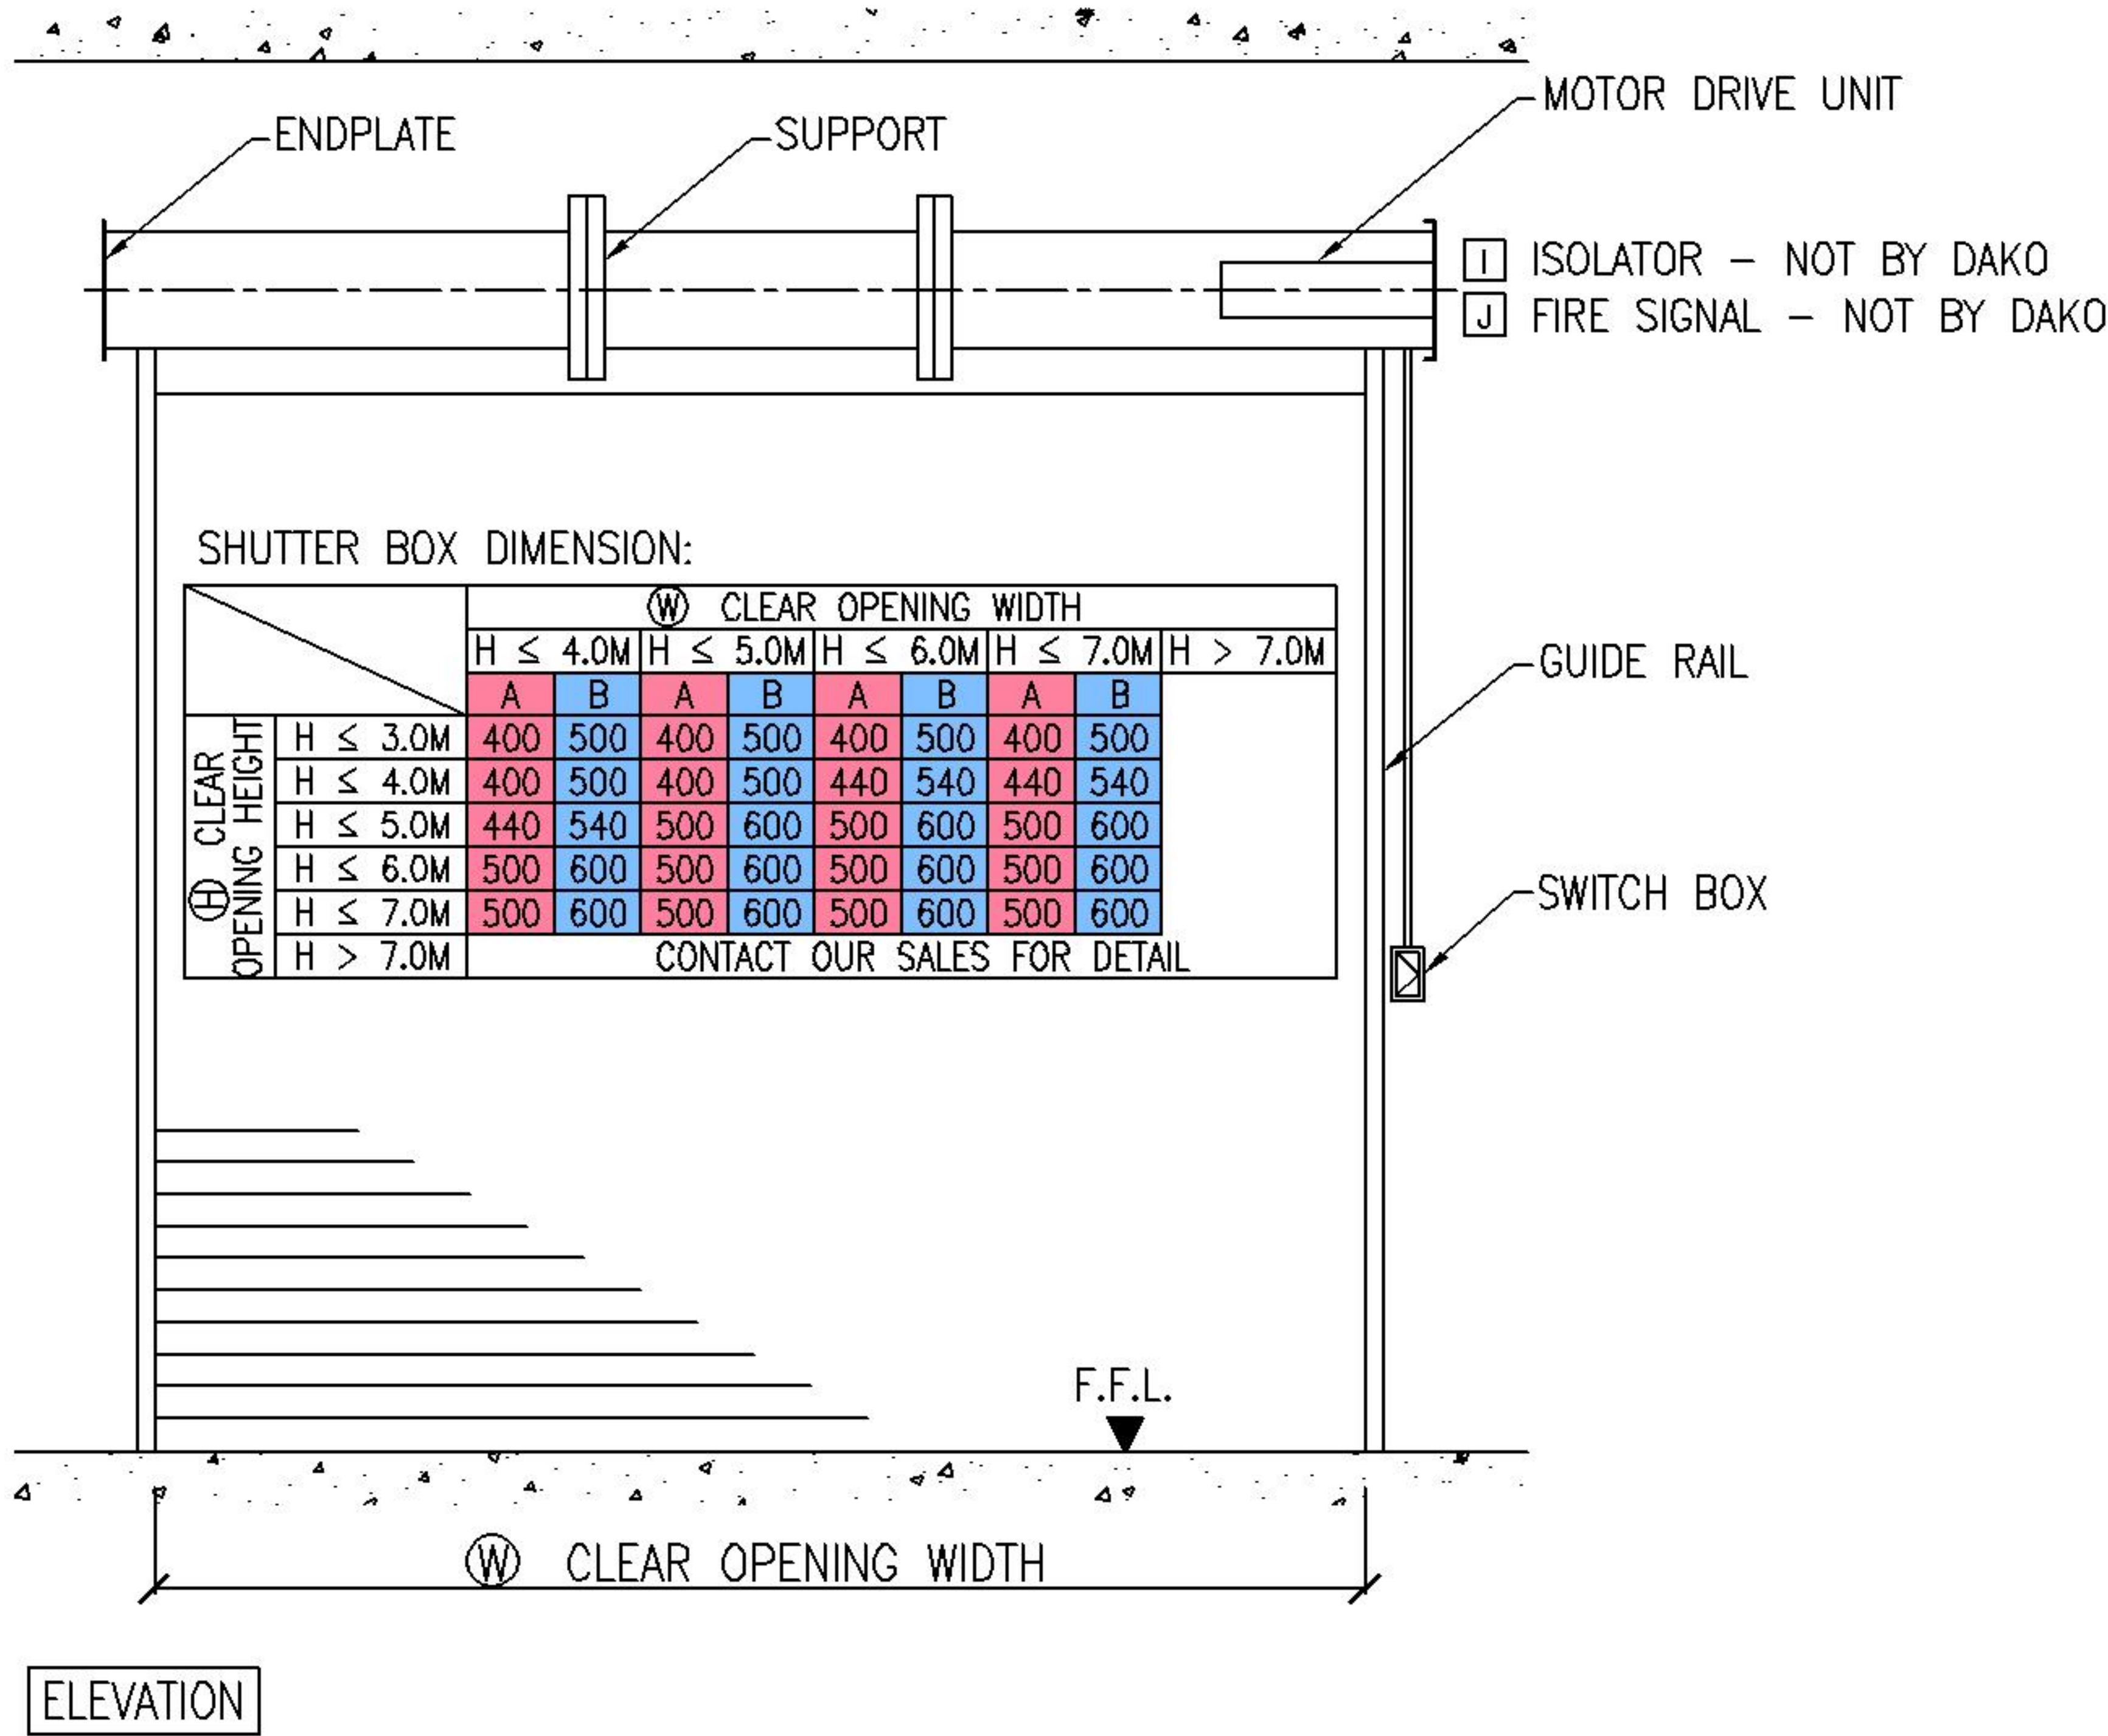


D-A7 Slat Curtain




D-A1 Slat Curtain

Standard Design Drawing:

Lateral Sliding Fire Shutter

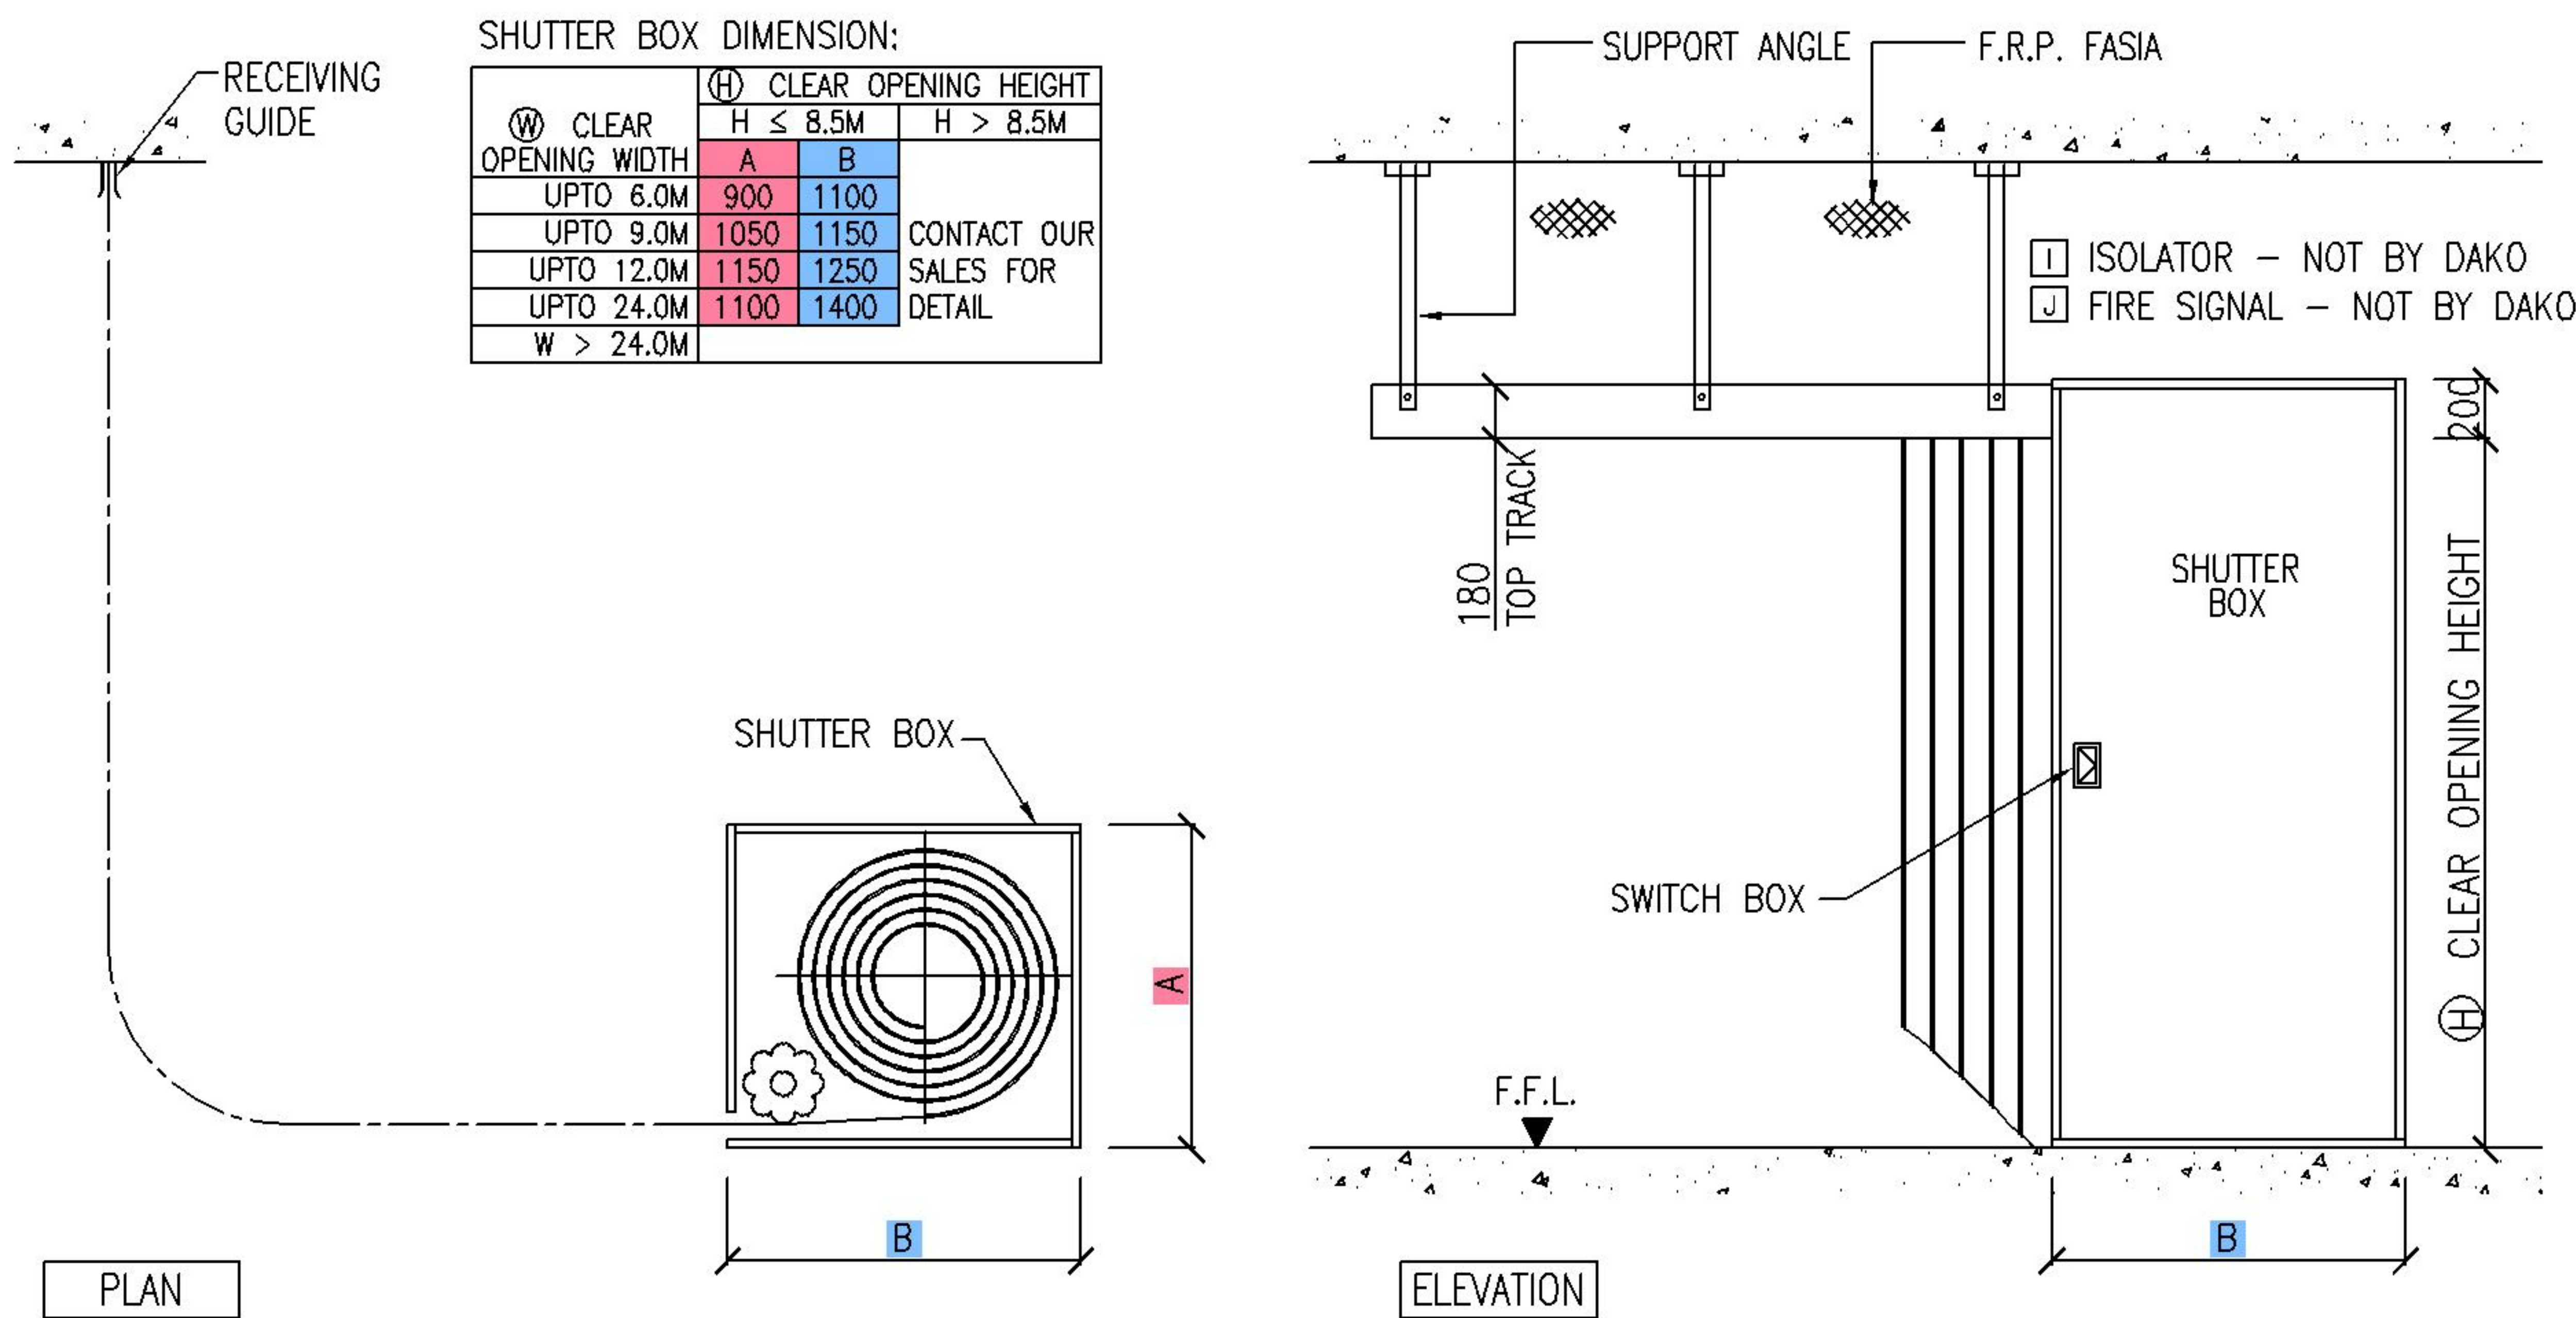

Horizontal Sliding Fire Shutter

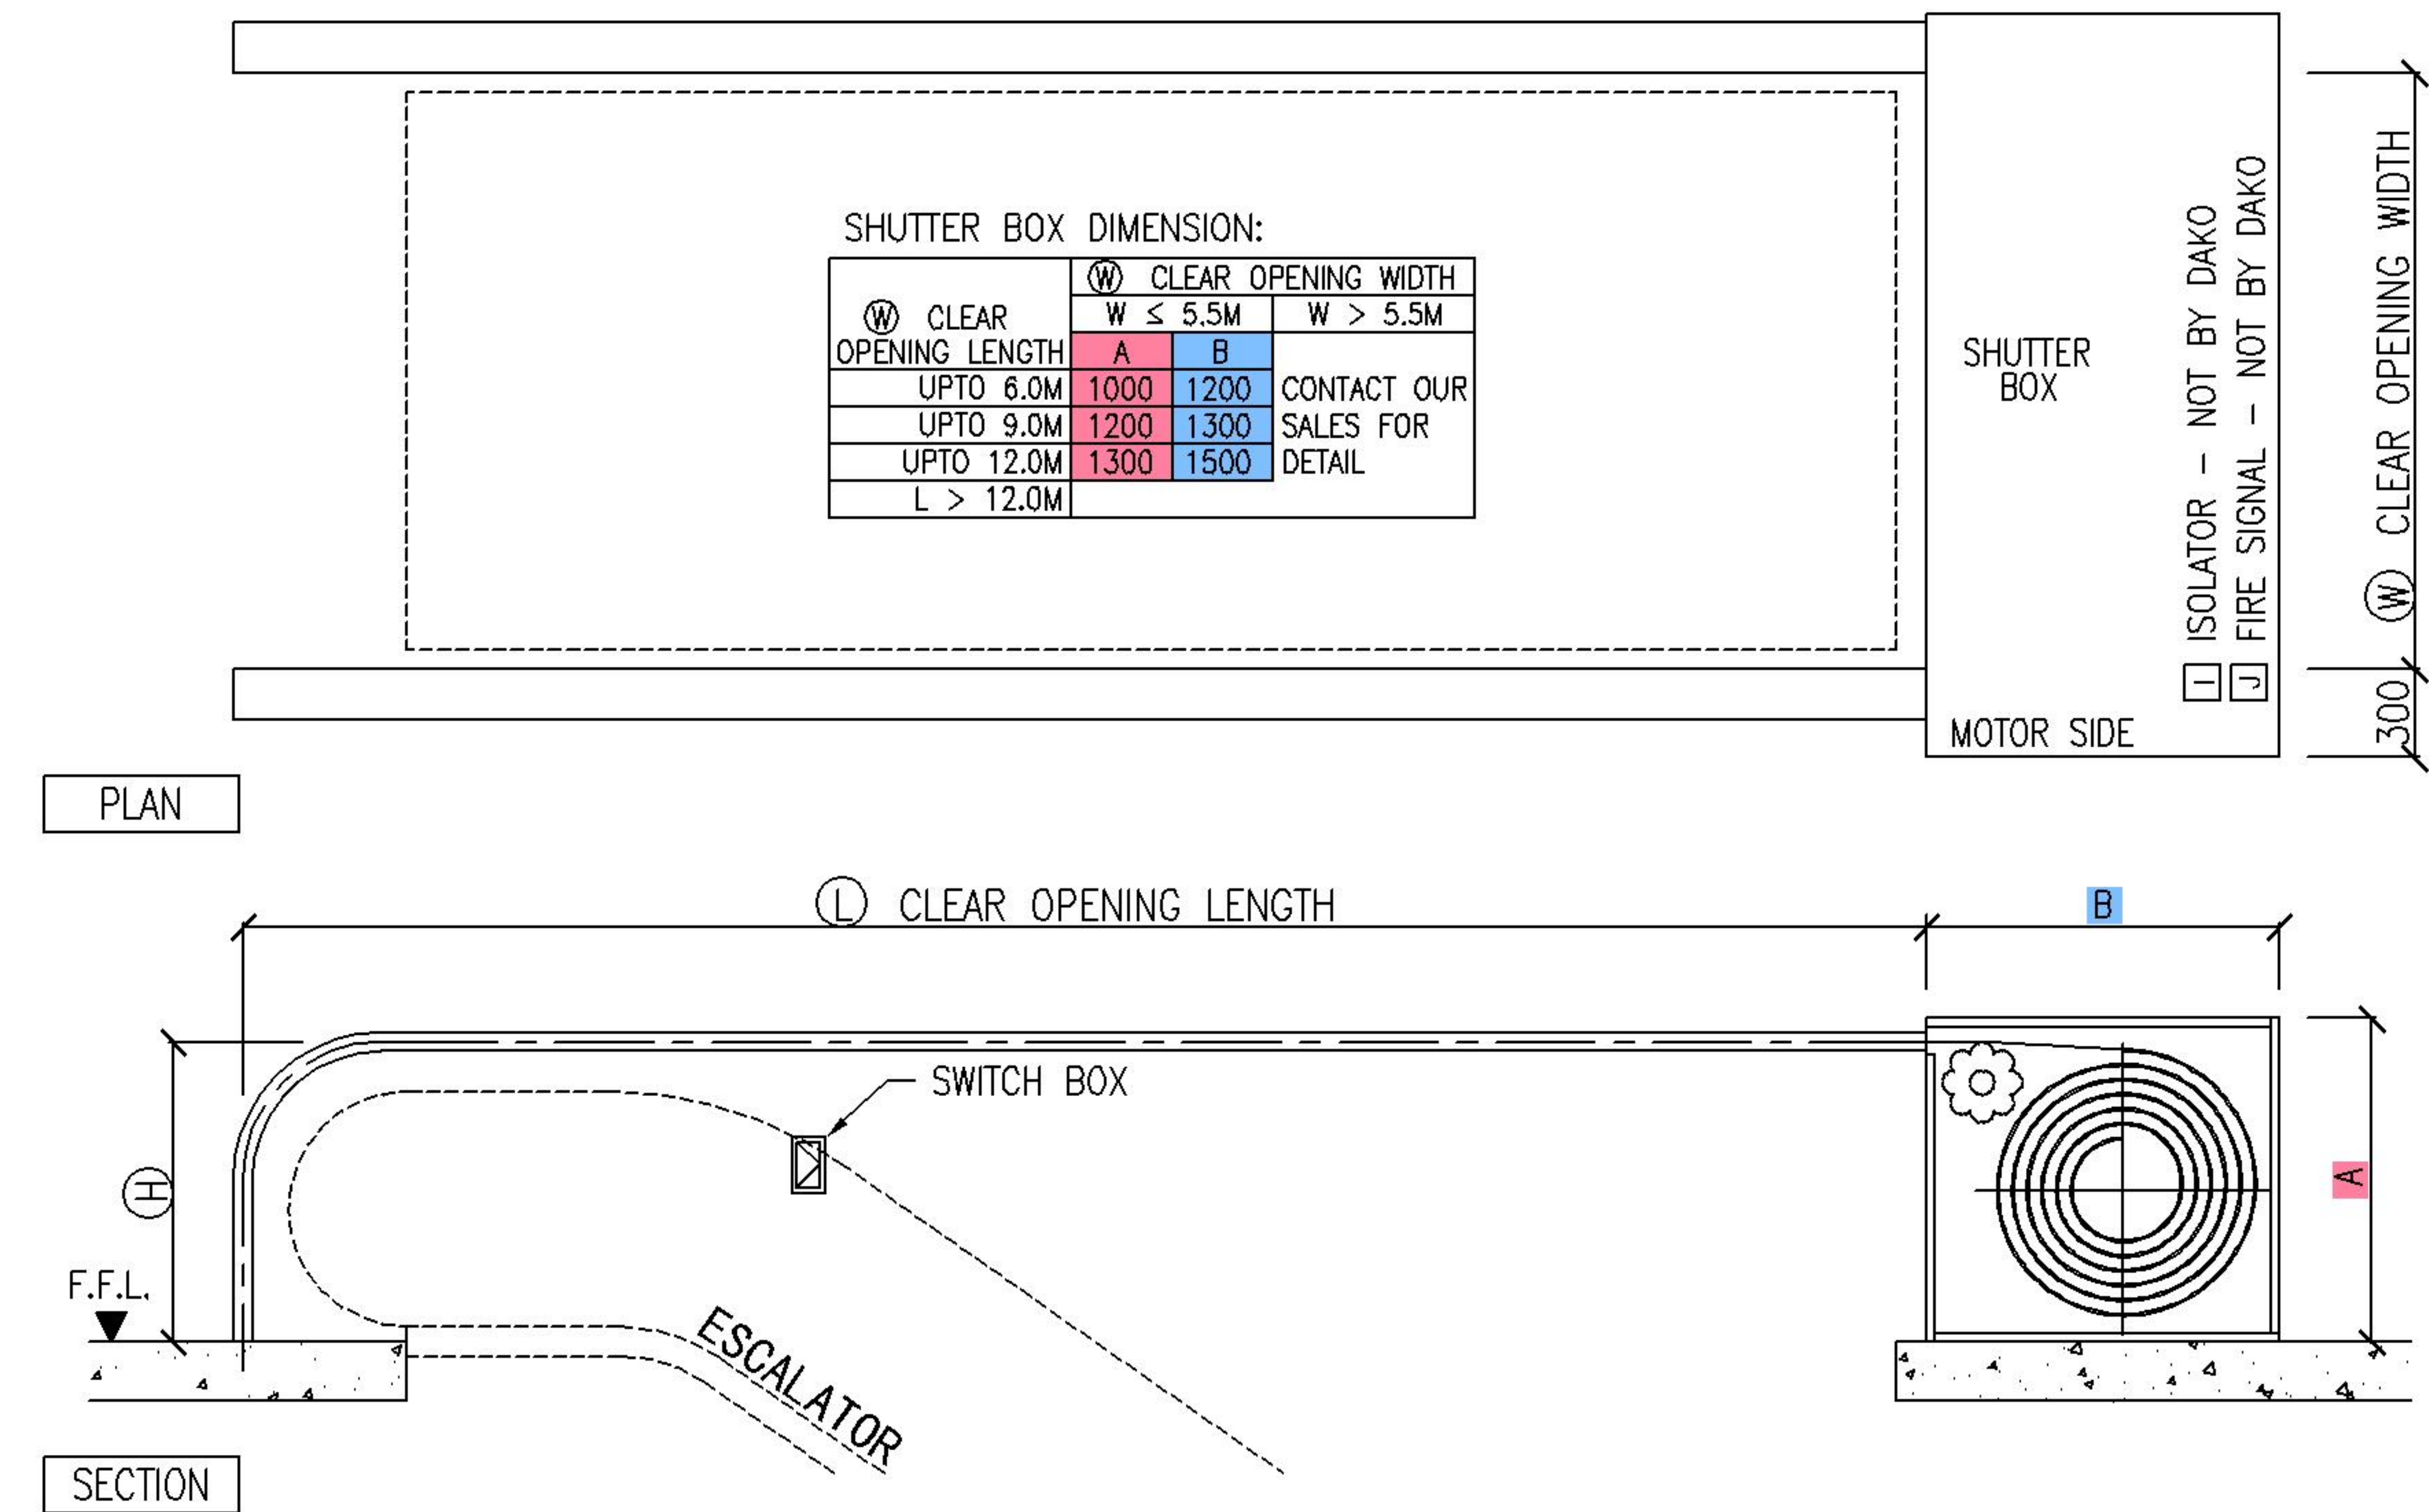

THE DESIGN SPECIFICATIONS ARE SUBJECT TO REVIEW FOR QUALITY IMPROVEMENTS



Dako (HK) Limited
迪豪(香港)有限公司

15B Granville House, 41C Granville Road, Tsim Sha Tsui, Hong Kong
T +852 2137 8951 F +852 3011 1265 info@dako.com.hk www.dako.com.hk